

E 7.5 - 1 0 2 3 2

CB142418

SK No. 580 - 0

Final

Report

04
ON THE POSSIBILITIES OF DETERMINING THE BASIN
CHARACTERISTICS BY MEANS OF SATELLITE IMAGES
(E75-10232) ON THE POSSIBILITIES OF
DETERMINING THE BASIN CHARACTERISTICS BY
MEANS OF SATELLITE IMAGES Final Report

(Helsinki Univ.) 25 p HC \$3.25 CSCL 08E

N75-21757

Unclassified
G3/43 00232

Erkki Palosuo

Risto Kuittinen

Department of Geophysics
University of Helsinki
Vironkatu 7
SF-00170 Helsinki 17
Finland

National Board of Waters
Hydrological Office
Vuorikatu 24
SF-00100 Helsinki 10
Finland

"Made available under NASA sponsorship
in the interest of early and wide dissemination of Earth Resources Survey
Program information, without liability
for any use made thereon."

Original photography may be purchased from:
EROS Data Center
10th and Dakota Avenue
Sioux Falls, SD 57198

Coddard Space Flight Center
Greenbelt, Maryland 20771

1580C

RECEIVED

JAN 23 1975

SIS/902.6

REPORT STANDARD TITLE PAGE

1. SR No.	2. Type of Report	3.
580 - 02	III Final Report	
4. Title	5. Report Date	
On the possibilities of determining the basin characteristics by means of satellite images	1974-01-07	
7. Principal Investigator Prof. Erkki Palosuo	6. Period Covered	
	November 1972 - December 1973	
9. Name and Address of Principal Investigators Organization	8. No. of Pages	
Department of Geophysics, University of Helsinki Vironkatu 7, SF-00170 Helsinki 17, Finland	5	
10. Principal Investiga. Rept.No.		
12. Sponsoring Agency Name and Address	11. GSPC Technical Monitor	
	James C. Broderick	
14. Supplementary Notes Report prepared by Risto Kuittinen, co-investigator	13. Key Words (Selected by Principal Investigator)	
15. Abstract	<p>ERTS-1 data was analyzed to find out, whether it is possible to determine the basin characteristics of river basins in Finland solely by means of satellite images. The ERTS-1 images used in this study were taken 30.8.1972 and 31.8.1972, and the test site is situated in Western Finland near Vaasa. Percentage of cultivated land, volume of growing stock, percentage of peat land and coarse soils were interpreted and the results were compared with topographic and soil maps. Cultivated lands and peatlands are the most easy ones to interpret while the interpretation of the volume of growing stock and coarse soils is more difficult. It is obvious that the basin characteristics mentioned above can be interpreted with sufficient accuracy by means of ERTS-images.</p>	

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
Abstract	1
1 Background	1
2 Methods of analysis	1
3 Results	3
4 Conclusions	6

On the possibilities of determining the basin characteristics by means of satellite images

Abstract

ERTS-1 data was analyzed to find out, whether it is possible to determine the basin characteristics of river basins in Finland solely by means of satellite images. The ERTS-1 images used in this study were taken 30.8.1972 and 31.8.1972, and the test site is situated in Western Finland near Vaasa. Percentage of cultivated land, volume of growing stock, percentage of peat land and coarse soils were interpreted and the results were compared with topographic and soil maps. Cultivated lands and peatlands are the most easy ones to interpret while the interpretation of the volume of growing stock and coarse soils is more difficult. It is obvious that the basin characteristics mentioned above can be interpreted with sufficient accuracy by means of ERTS-images.

1 Background

When making runoff forecasts and models the basin characteristics are one thing the knowledge of which improves the results and the usability of the forecasts and models. In Finland, effects of meteorologic and basin characteristics of runoff and discharge have been investigated by means of small basins (area 0,12 - 122,00 km²). According to these studies, land slope, percentage of cultivated land, volume of growing stock, percentage of peat land and coarse soils are the most important basin characteristics in Finland.

The aim of this study is to investigate whether it is possible to determine the basin characteristics solely by means of satellite images, because the determination of the basin characteristics of large basins by means of maps and aerial photos is laborious and slow. The test site is situated in Southern Bothnia near Vaasa and it consist of Närvinjoki and Teuvanjoki basins. The total area of Närvinjoki basin is 996 km² and Teuvanjoki basin 530 km². The lake percentages are correspondingly 0,07 and 0,12 (see Appendix 1).

2 Methods of analysis

The interpretation of satellite images was based on a ground inventory, made

in summer 1973, and on interpretation experiments outside the test site. These experiments were made by means of topographic maps (scale 1:20000), the general map of Finland (scale 1:400000), a soil map (scale 1:400000) and a ground inventory. In Figure 1, there is a semantic figure of a typical Finnish terrain of those areas been under water after the latest glacial period. This kind of order of terrain types and soils, either complete or partly complete, exists at the whole test site and the interpretation of basin characteristics was mainly based on the interpretation of different kinds of terrain types.

In this study, following ERTS-1 images were used:

ID number	type of image	
1038-09275	9,5 " x 9,5 "	bulk B&W, MSS bands 4, 5, 6, 7
1038-09275	9,5 " x 9,5 "	bulk color, MSS
1039-09333	9,5 " x 9,5 "	bulk color, MSS

The images were taken 30.8.1972 and 31.8.1972 and their quality was excellent.

By investigating one bog and terrain types around it, it was possible to make suitable color composites for the interpretation. The investigation was done as follows:

Positive MSS B&W transparency images (bands 4,5 and 7) were printed on Agfa Geavert's lithographic film, Gevalit Ortho 0 38 P, so that the scale become about 1:20000.

On the basis of the topographic map, test lines were selected, the densities of which were measured by means of Quanta Log diffuse densitometer in the B&W transparent photos. The terrain types of these test lines were interpreted using the topographic map and the ground inventory. In the Appendix 2, there is a map including these test lines and in Appendix 3, the results of the density measurements are presented.

On the basis of these density measurements, color composites were made so that spruce forest got dark green color. Thus, the color differences of other terrain types were very good. The scale of color composites was about 1:400000 and they were made on Kodak Ektacolor Print Film and Kodak Ektacolor 37 RC paper. These images and color composites 1:1000000 from NASA were used in the final interpretation. In Appendix 4, there is an example of a

color composite made on Kodak Ektacolor 37 RC paper.

The images were interpreted by means of Interpretoskop II made by VEB Carl Zeiss JENA. The magnifications used were 2-5 or the interpretation was made in scales 1:1000000 - 1:80000.

3 Results

The error in area measurements of terrain types was about 10 % consisting mainly of the error in determining the borders exact. It was possible to determine the total area of the test site with the accuracy of 5 percent.

In the test site following things were interpreted:

- cultivated lands
- swamps, which were divided into open bogs and spruce-hardwood swamps
- forest land, which was divided into pine and spruce forests, spruce-hardwood forests and spruce-hardwood swamps. (According to the standards of the Finish forest inventory forest land has the potential quality for producing a mean annual increment of at least $1 \text{ m}^3/\text{ha}$ of steam wood including bark, during a rotation of 100 years and under favorable stand conditions).
- soils, which were divided into peatlands, coarse soils and other soils (fine soils). Boulders, gravel soils, gravel moraine soils, sand soils and sand moraine soils were included in coarse soils. Finesand soils, finesand moraine soils, silt soils, silt moraine soils, clay soils and clay moraine soils were included in fine soils.

Because of the small scale of the images it was necessary to generalize the description of the interpretation results. If the scale of the prints of the satellite images had been for example 1:100000, the results might have been more accurate as can be seen in the map in Appendix 5.

Cultivated lands are presented in Figure 2. Cultivated lands are easy to interpret provided they are not too small and they are not in the middle of a forest or a swamp, in which case they are easily mixed with open bogs (see Appendix 5, Number 1). Percentage of cultivated land is 28 measured in images. The same percentage is 26 measured in maps.

Open bogs are easy to interpret. It is, however, impossible to distinguish a ditched swamp from spruce-hardwood swamps, because the vegetation of swamps is changed by draining, so that they get vegetation like spruce-hardwood swamps (see Appendix 5, Number 2). Open bogs cover 30 % (129 km^2) of the total swamp area and spruce-hardwood swamps and ditched swamps 70 % (299 km^2) of the total swamp area. Percentage of swamp is 28 in the test site measured in the images. According to the 4th national inventory of Finnish forests in 1961 the swamp percentage is 39 %. When ditched swamps are excluded the percentage is 30 %. Most of these ditched swamps have changed so much in eleven years, that they can be included in spruce-hardwood forests in 1972.

As a rule, spruce-hardwood swamps and ditched swamps are easy to distinguish from open bogs and other forest types, excluding bushes and in some cases hardwood forests. These forests were, however, very small in number in the test site. Swamp types are presented in Figure 3.

On the basis of the volume of growing stock, forests were divided into three classes:

- coniferous forests consisting of pine forests and spruce forests on mineral soils. These types were quite easy to interpret because of their dark color in the image. The mean volume of growing stock is in these forest types about $180 \text{ m}^3/\text{ha}$ (see Appendix 5, Number 3). These forests cover 10 % (99 km^2) of the total forest area and the total volume of growing stock was 17820000 m^3 .
- spruce-hardwood forests consisting mainly of spruce and birch. The soil type of these areas is in part mineral in part organic soil (small ditched or spruce-hardwood swamps). The mean volume of growing stock of these forests is about $130 \text{ m}^3/\text{ha}$ (see Appendix 5, Number 4). Most of the forests of the test site belonged into this group. These forests cover 59 % (582 km^2) of the total forest area, and about 10 % of this area is cleared by cutting (volume of growing stock $0 \text{ m}^3/\text{ha}$). The total volume of growing stock was 68094000 m^3 .
- spruce-hardwood swamps, which were relatively easy to interpret (see Appendix 5, Number 5). The mean volume of growing stock of these swamps is about $80 \text{ m}^3/\text{ha}$. These areas cover 31 % (299 km^2) of the total forest area and about 10 % of this area is cleared by cutting (volume of growing stock $0 \text{ m}^3/\text{ha}$). The total volume of growing stock was 21520000 m^3 .

The total forest area is 980 km² and the mean volume of growing stock is 109 m³/ha by means of this interpretation. According to the 5th national inventory of Finlands forest resources in year 1968 the mean volume of growing stock was in this area 91 m³/ha. The change in growing is according to the earlier inventories about +17 % in 14 years in this area (1). Thus the volume of growing stock is nowadays about 96 m³/ha in the test site.

In Figure 5 the three forest classes are presented and in Appendix 5 an example of the interpretation of these three classes and open areas are presented. Open areas consist manly of cultivated lands, areas cleared by cutting, open bogs and roads.

The interpretation of soil types was mainly based on the interpretation of vegetation and terrain types, and the interpreted soil types were coarse soils, peatlands and other soils (fine soils). In Figure 4, these three groups of soils in the test site are presented, and in Appendix 6, there is a soil map of the test site. Peatlands were the most easy ones to interpret. Coarse and fine soils could also be distinguished as well, but sometimes, the limit between them was impossible to determine. Peatlands cover 33 % (503 km²), coarse soils 42 % (641 km²) and fine soils 25 % (382 km²) of the total area. The total area of peatlands is changig all the time because of the drainage. According to the general geological map of Finland (1954) the area of peatland cover about 35 % of the total area. Open bogs cover 25-35 % and spruce-hardwood swamps 65-75 % of the total swamp area. It is not possible to compare the results of the interpretation of coarse and fine soils with the general geological map. The soil map in Appendix 6 is quite much generalized and thus, it is possible by means of satellite images to determine the limits between peatlands and mineral soils better. It may also be noted that in the general map (Appendix 1) the swamps are sometimes different from the peatlands in the soil map. It is obvious that the utilization use of satellite images in making general maps and soil maps would improve the right generalization of these maps.

ORIGINAL PAGE IS
OF POOR QUALITY

4 Conclusions


The interpretation of the basin characteristics based only on ERTS-1 images gives adequately good results in Finland. It is possible to determine cultivated lands, forests and swamps exactly enough. By using only three categories, it obviously is possible to approximate the volumes of growing stocks. Peatlands and mineral lands are distinguishable very well, while it is sometimes rather difficult to distinguish coarse soils from fine soils, but it is obvious that satisfactory results can be achieved. Lakes and rivers are easy to interpret.

If it is possible to use suitable maps with satellite images, the results will obviously be better in some cases than solely by means of satellite images. On the other side, suitable maps may sometimes reduce the need of satellite images. Because the determination of the areas of terrain and soil types is an essential part of the determination the basin characteristics, the satellite images must be precisely processed. It is obvious that by improving interpretation technics by using digital interpretation of satellite images, it is possible to determine the basin characteristics of the river basins of Finland in the most suitable way. In 1974 Technical Research Center of Finland has started a study, one aim of which is to find out the possibilities of automated pattern recognition in determining basin characteristics. The data used in this investigation is ERTS video data and Bendix M²S scanner data. After this investigation it is possible to say, how we will use ERTS imagery in watershed studies.

ORIGINAL PAGE IS
OF POOR QUALITY

References: Kuusela, K. 1970. Forest resources in Southern half of Finland in 1964-1968 and their development. *Metsäntutkimuslaitoksen julkaisuja* 71.1. Helsinki. /1/.

2 Vegetation and terrain types

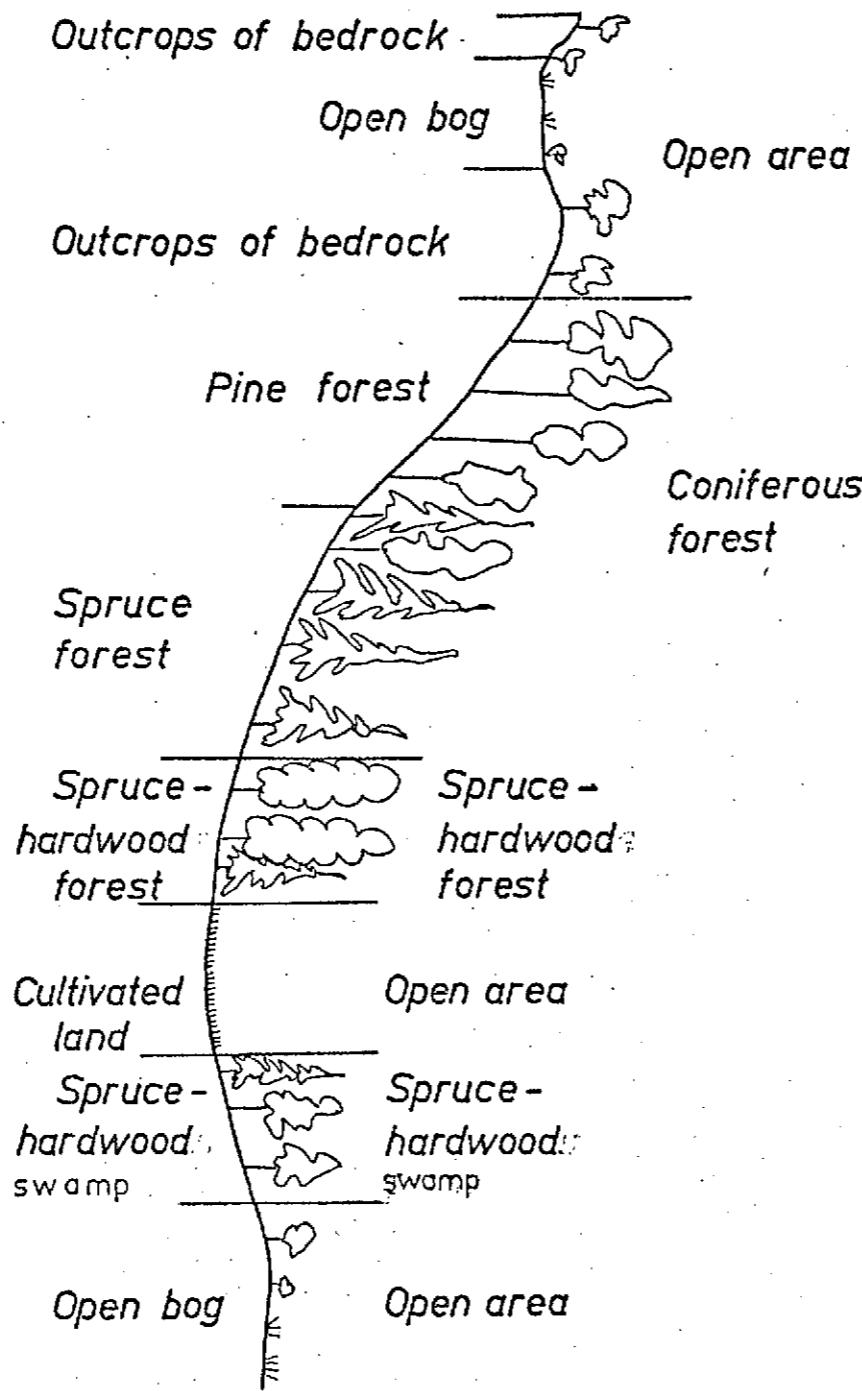

1 Soil types

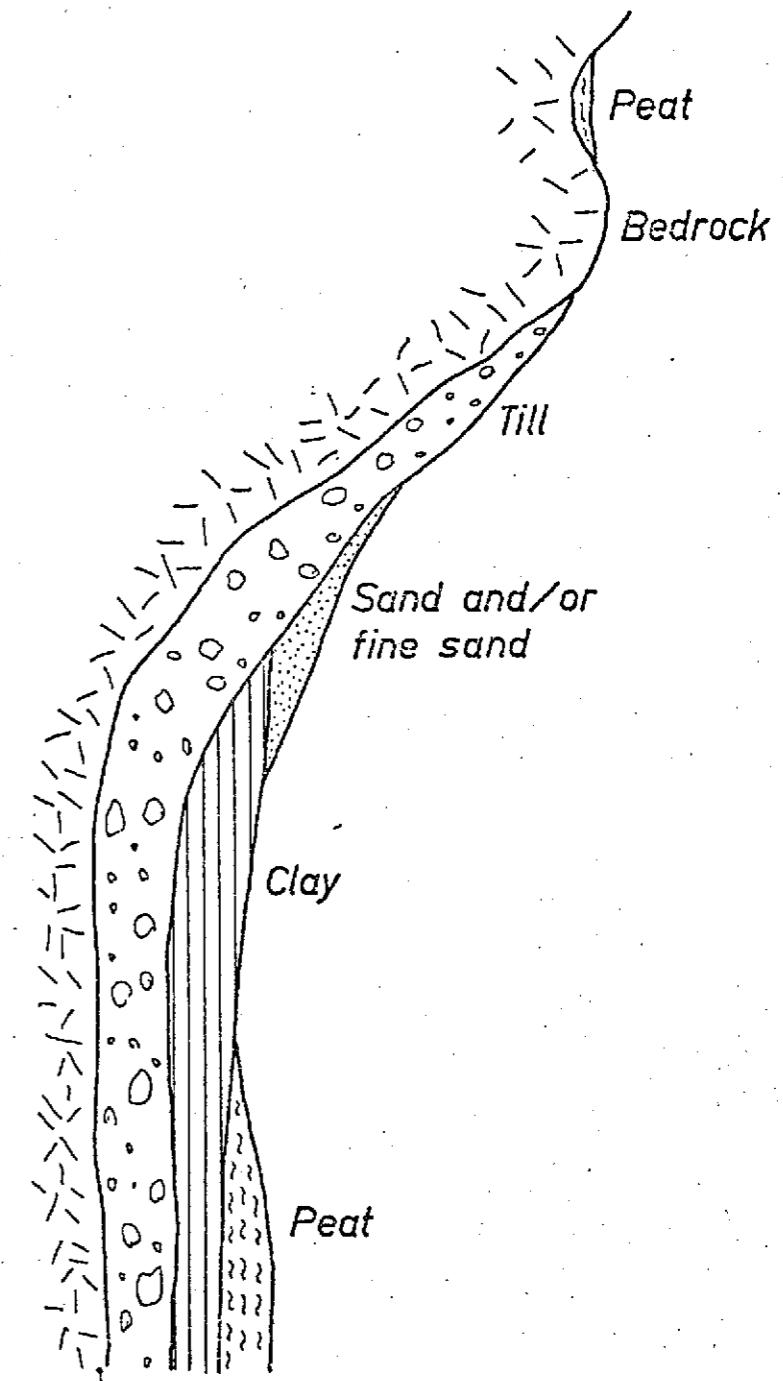


Figure 1


Figure 2

Legend:

P Cultivated land

N

Scale 1:385000

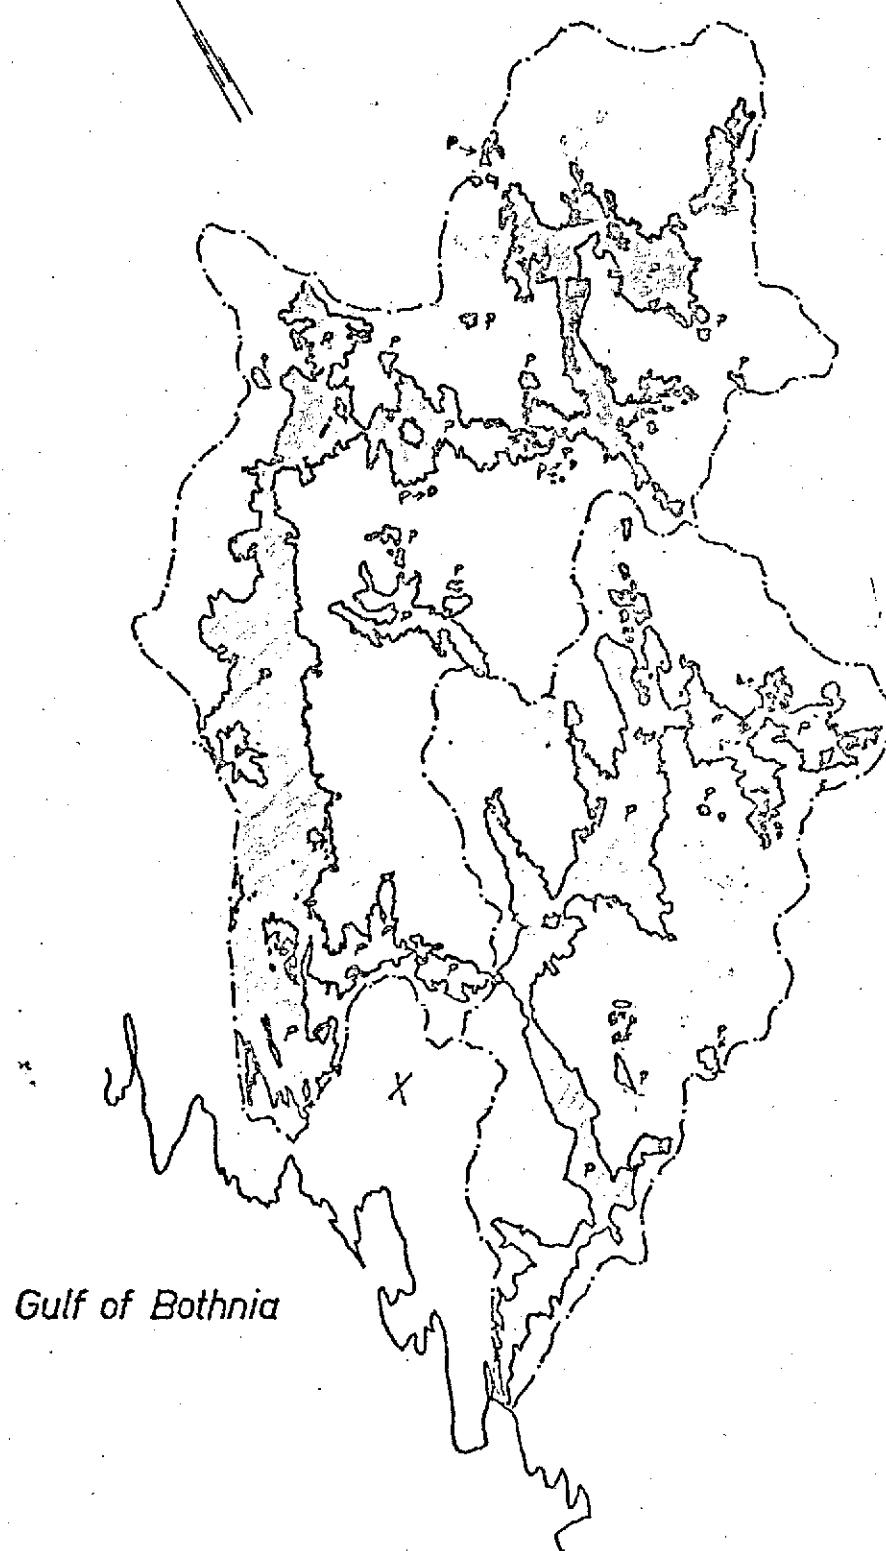

ORIGINAL PAGE IS
OF POOR QUALITY


Figure 3

Legend:

K Spruce-hardwood swamp
O Open bog

Scale 1:385000

N

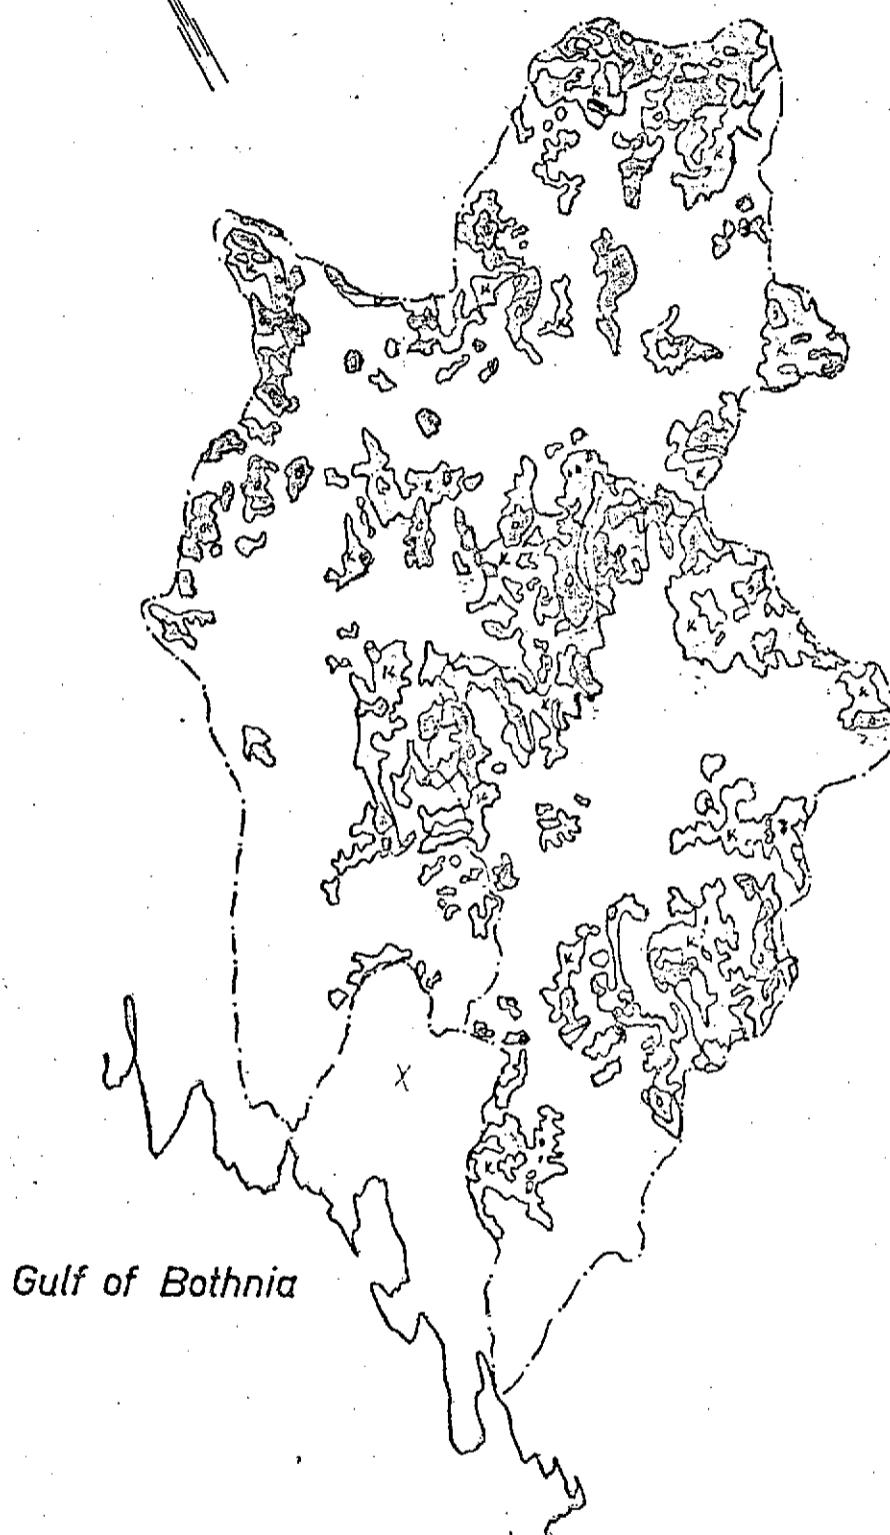

ORIGINAL PAGE IS
OF POOR QUALITY


Figure 4

Legend:

K Coarse soil
T Peat
H Fine soil

Scale 1:385000

N

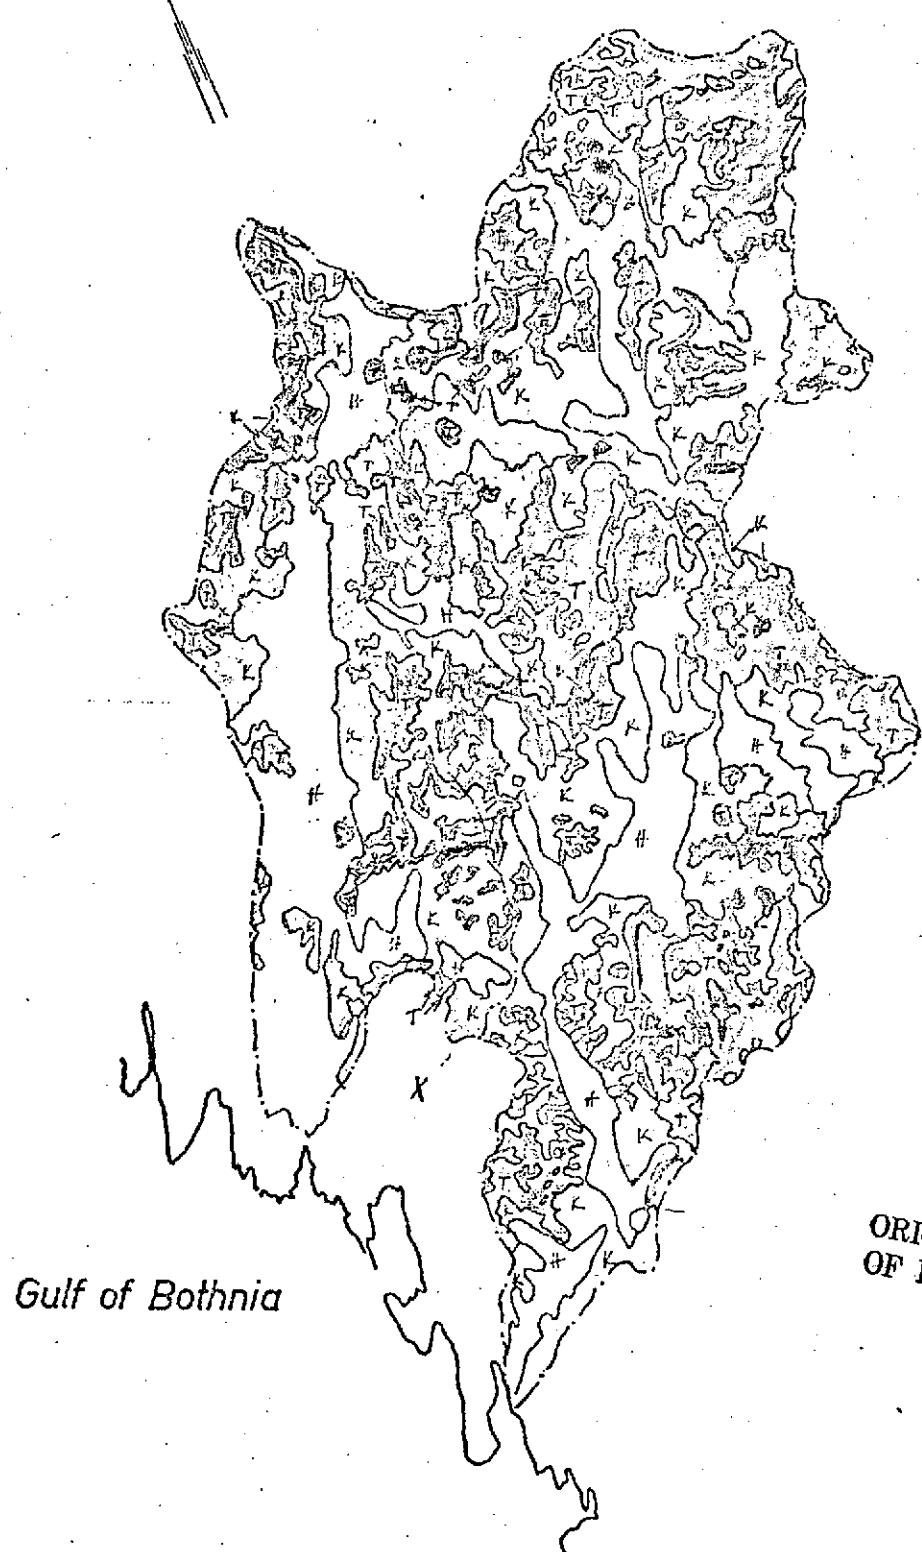

Gulf of Bothnia

ORIGINAL PAGE IS
OF POOR QUALITY

Appendix 1


YLEISKARTTA 1:400 000 GENERALKARTA

FOLDOUT FRAME

ORIGINAL PAGE IS
OF POOR QUALITY

FOLDOUT FRAME

ORIGINAL PAGE IS
OF POOR QUALITY

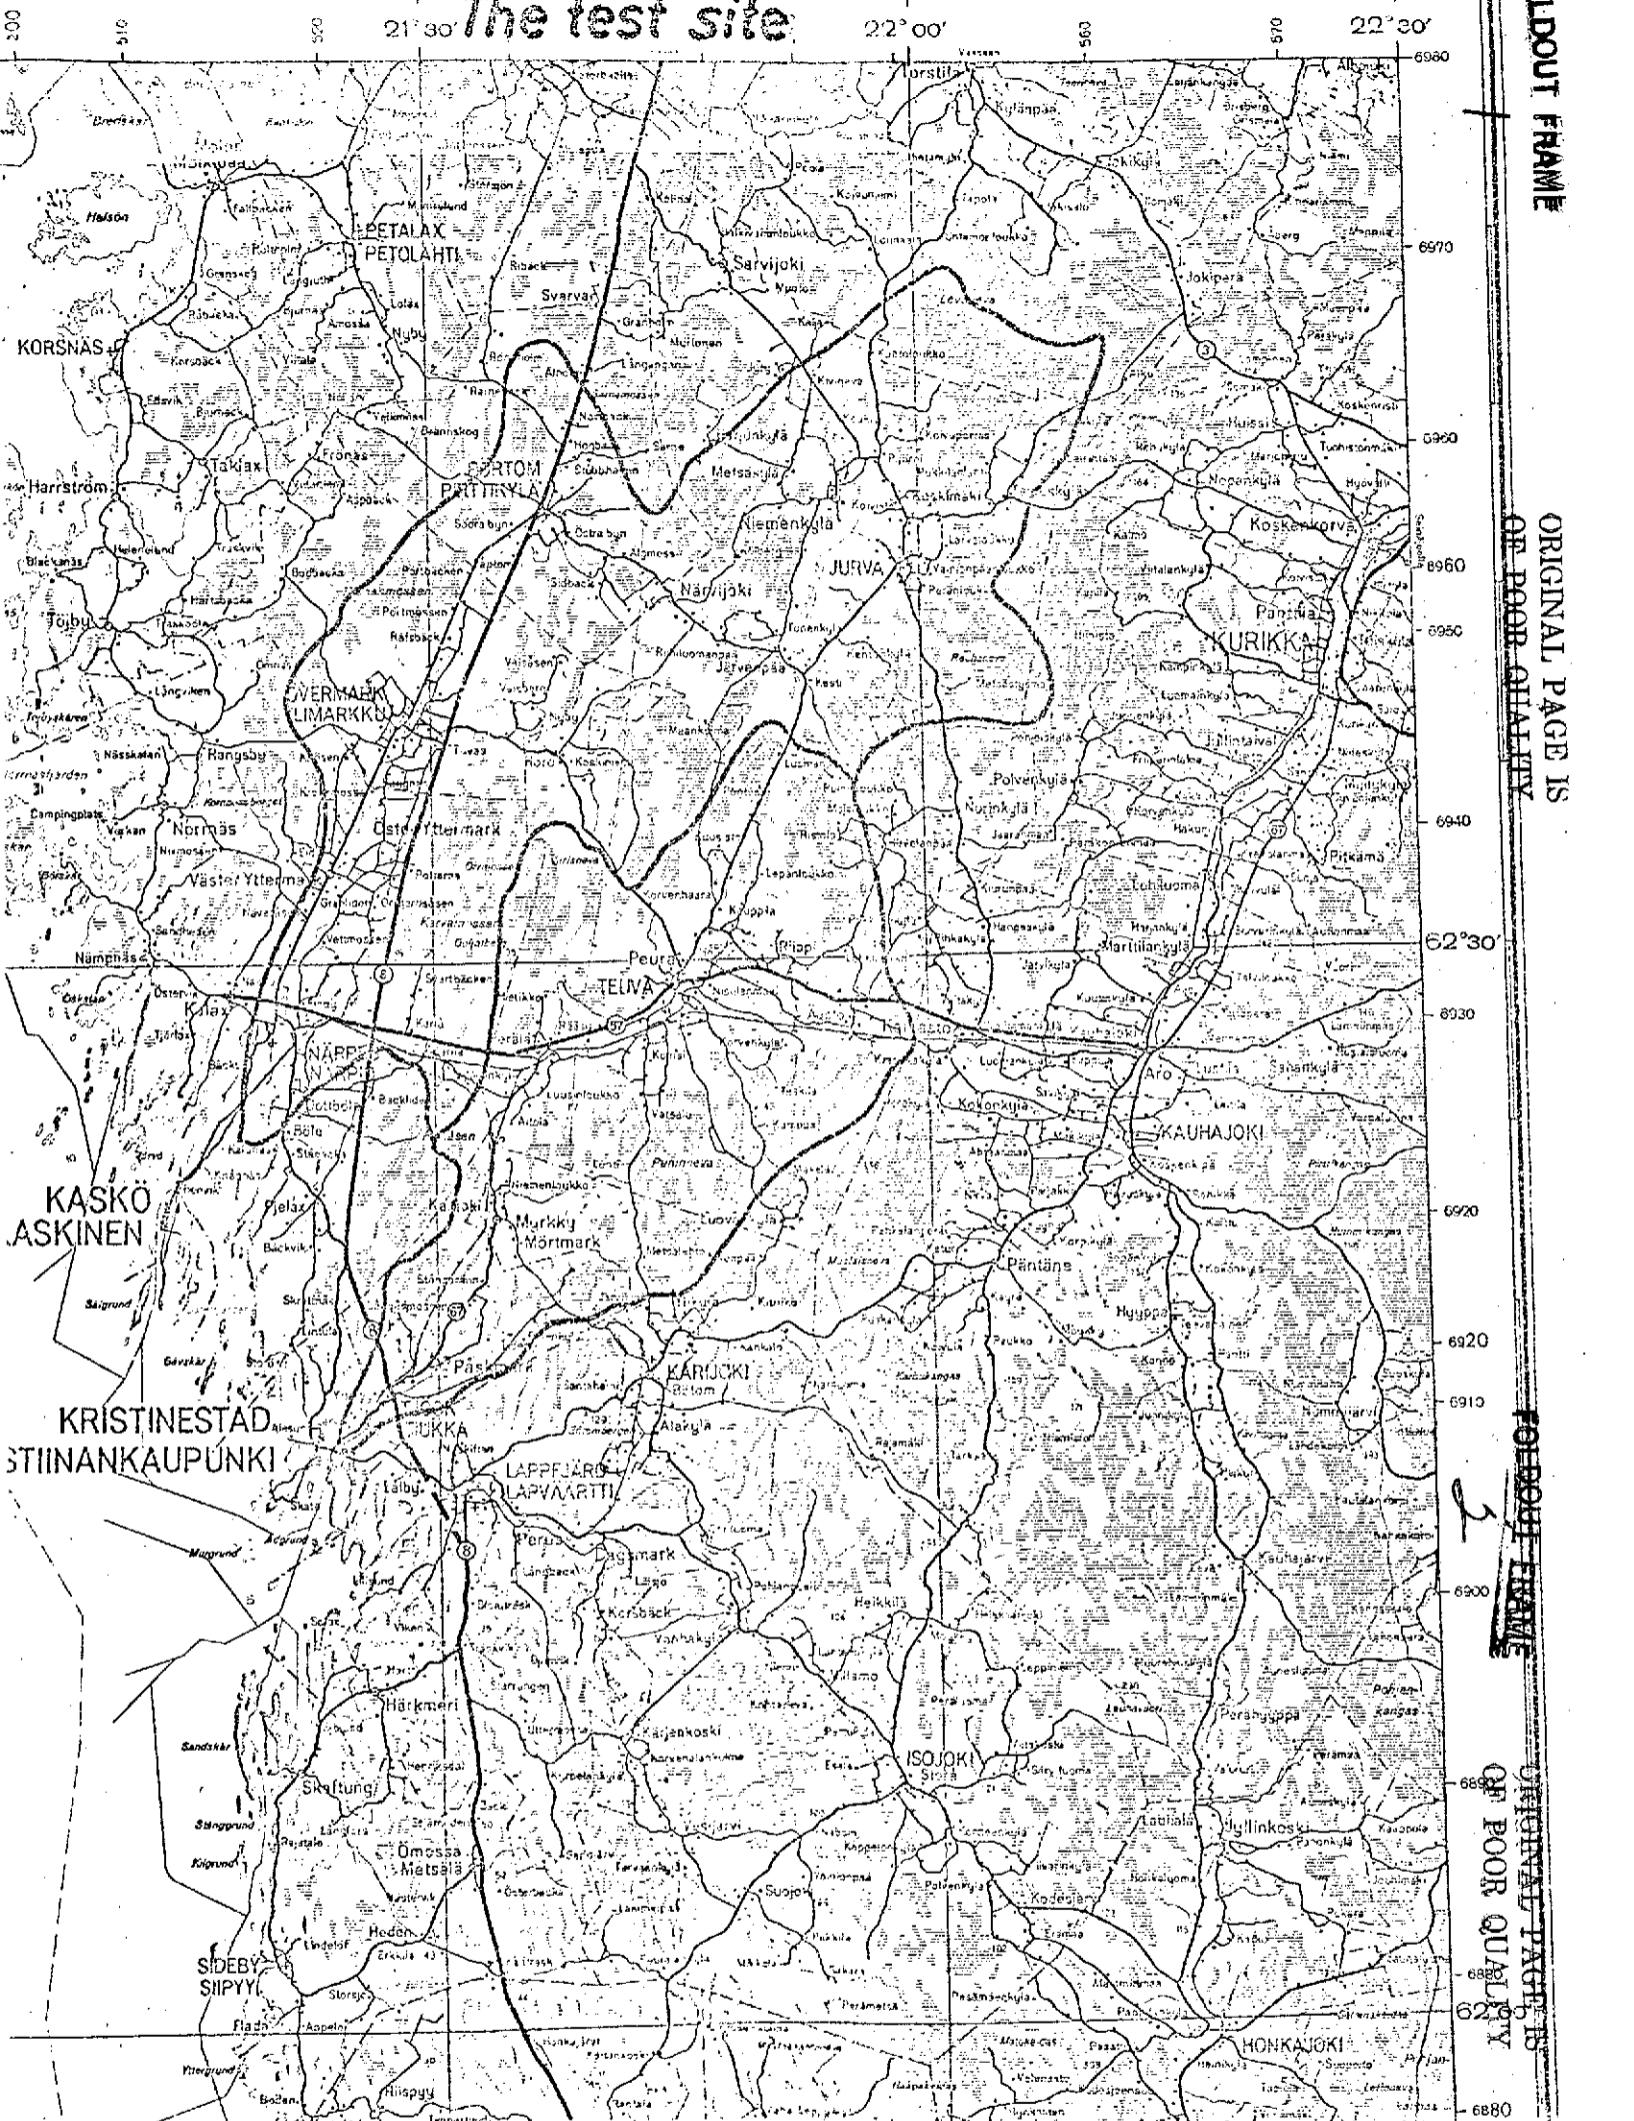


Appendix 2

The test lines

Appearance

The text

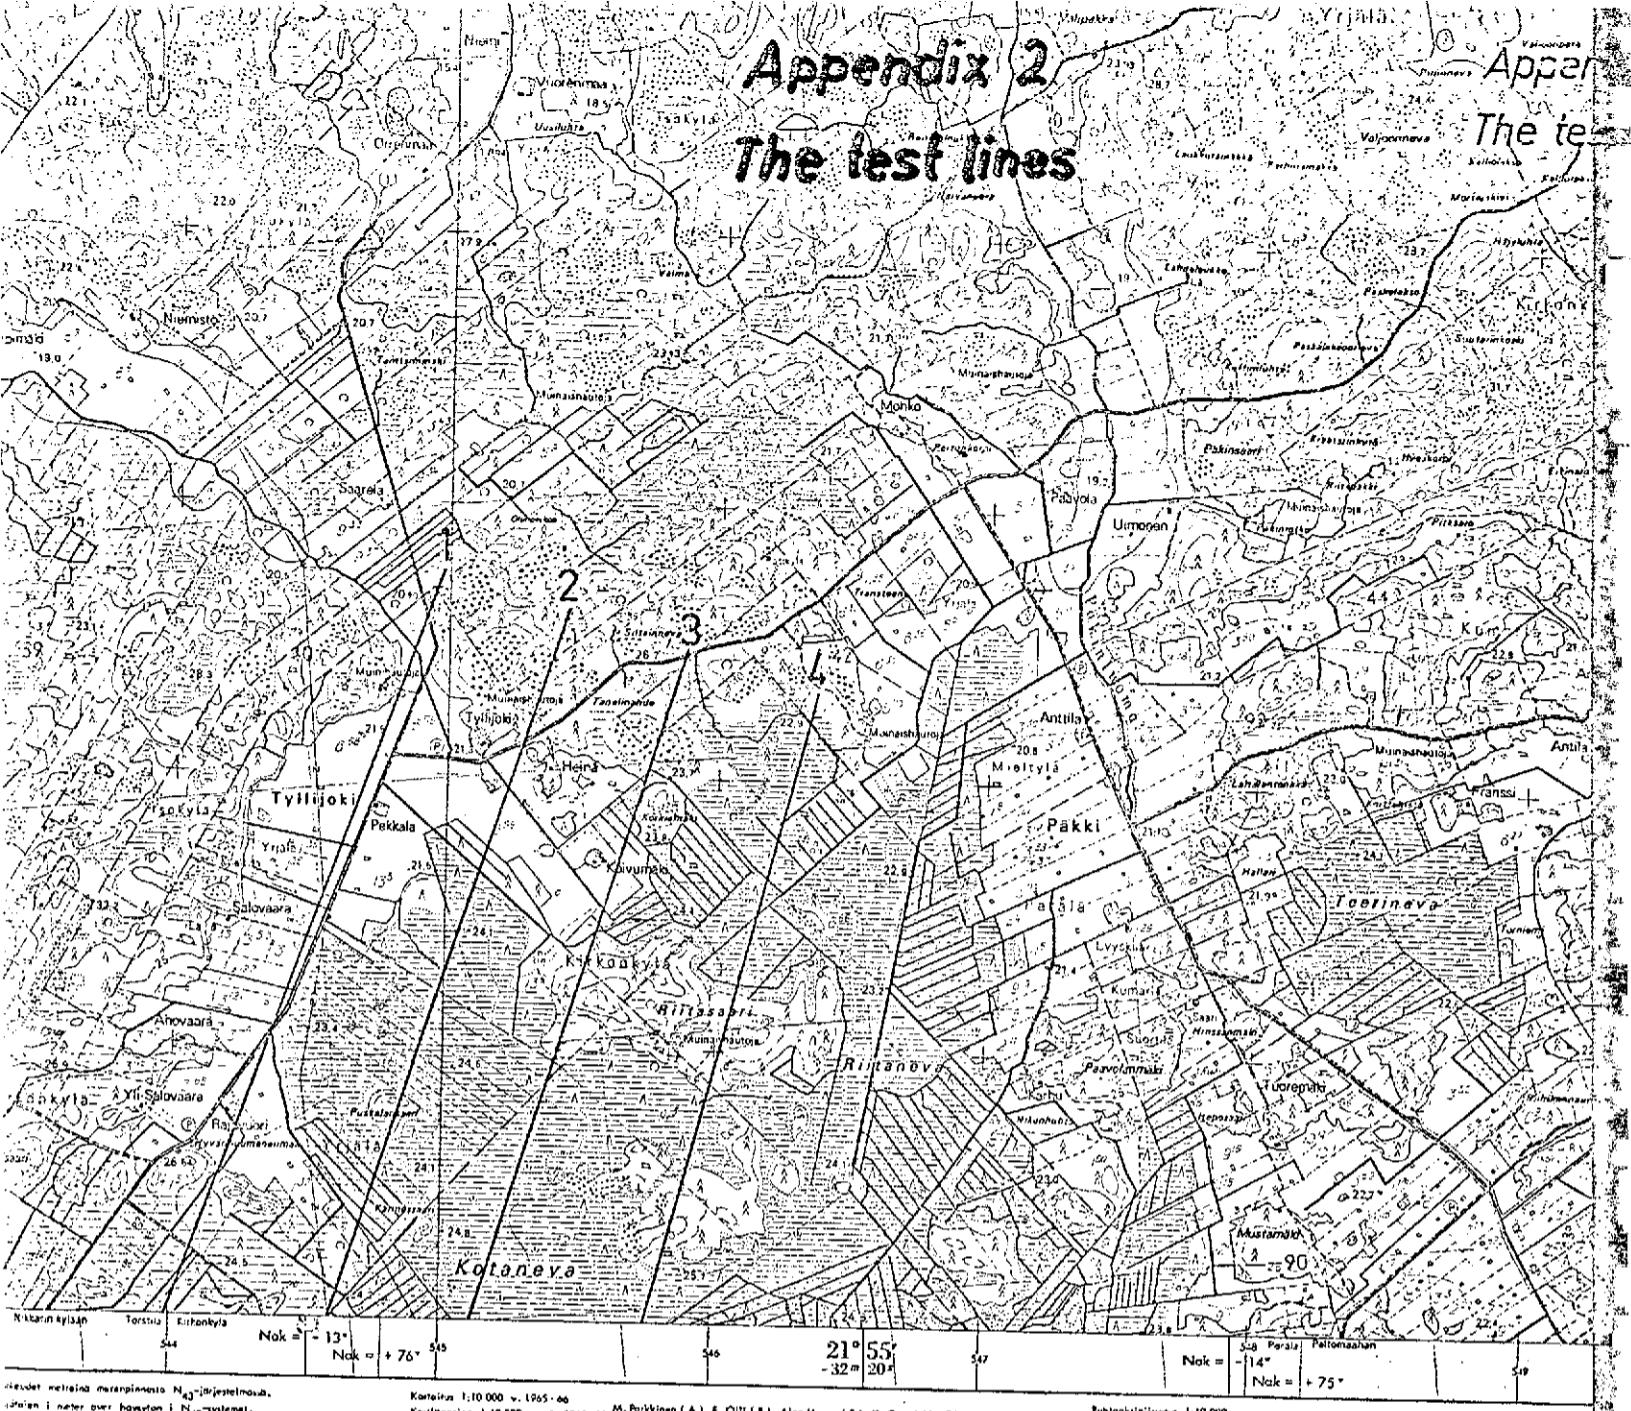

skal det metriska mätpunktena N_{43} -driftestolmata
läggas i meter över havet i N_{43} -systemet.
39

Kortesius 1:10 000 av. 1965-66 M. Pölkkinen (A), E. Oitt (B), Alpo Heuna (S), K. Grönblad (C), T. Ylikorras (D) Puhelaispilariitti 1:10 000 S. Soronen, R. Putte, M. Heino
Kortilagging 1:10 000 av. 1965-66 Ropitintti 1:10 000 S. Soronen, R. Putte, M. Heino
240 > 43

549

Mitcakaaya 1:20000 Skala

102

		1 km kartalla vastaa 200 metriä maan
		pelto ja niitty äker ja ång
O	O	puita/ha, pulsto ja pulsoikdyttsälä
A	A	träädigr, park och parkvägar
A	A	mäntymetsä talliskog
A	A	kouvimetsä granskog
O	O	lehtimetsä lövskog
O	O	pensaiskko, tal tamlikko butiksr eller planbetecknd
A	A	hakatku ja palanus metsä avverkad och brandkakad skog
L	L	metallilima, levers alle ja yli 10 m stogslinje, bredd under och över 10 m
		humometsä hauu- ja lehtipuu dominerande barr- och lövträd
O	O	solisiva maa försärrumpning
		meiccinen ja aukoa suo, halppokukkainen skogbergen och öppen torvmark, beträdd varjakukkainen ja ylipäätsemön aukos suo torvmark, sovärt att berrada och ej hettädbä avokalioita = iki kiel kala berg och stor sten
		louhikko tai kivikkio ja hietikko gryt och sandlik

	1 cm på kartan motsvarar 200 m i terrängen
+	asuin-, liike-, tehdas- ja yleisilä rakenneksia bostads-, afärs-, fabriks- och allmänna byggnader
+	salous- ja varastorakennuksia uthus och magasiner
+	rakennuskuvaus suljeen rakennustavan alusilla - sluten bebyggelse i tätort
+	kirkko, kellokapelli, muistomerkki kyrka, klockstapel, minnesmerke
+	tuulimylly, tuulimöötöri, nötkörtori vadkvarn, vindmotor, utikistorn
+	varastoalue ja savupiippu estevalain förvaringsplats och skorsten med skyddsljus
+	muinaisjärjestys ja luonnonmuistomerkit fornlämning och naturminne
+	luonnonmuistomerkin raja gräns för naturskyddsområdet
+	puu- tai rauta-aita, kiviaita trä- eller järnängsel, stengärde
+	pentosi- ja kuusalaata håck
+	surjärnniteline ja muuntaja högspänninglinje med transformator
+	puhelinlinja telefonledning
+	louhos ja soran- tai Neikanottopalkka stensrott och grus- eller sanddikt
+	savien- ja mudan- tai turpeenottopalkka

	I a. ik, nopea autotie, kaksisjärjestelmä kl, snabb bilsväg med dubbla korbaron
	I b. ik, nopea autotie, 2-3, kaksilaivit kl, snabb bilsväg med 1-3 körfilar
	II a - II b. ik, autotie, kaksikäsinä kl, bilsväg med två körfilar
	III a - III b. ik, autotie, yksikäsinä kl, bilsväg med en körfil
	ketospalyläste (I b) ja kilometripylväs permanensbeläggning (I b) och km-stolpe
	rakenteltiä pölyä autotie bilsväg under byggnad
	motorrullie motorvagn
	valta- tai kantakäte setti mukaan huvud- eller ståvagn tänne annan färdväg
	palikkalite ja yksityistie bygderåg och enskild väg
	auto- tai traktoritie bil- eller traktorväg
	kärrystie körväg
	kärrypolku ja kapulitie körstig och körväg
	polku tai hevonsalitie sekä pikasuoitus väg eller vinterkörväg, spångsö till
	polkunäkötie

— yksilaitteinen rautatie
enkeliplärrä Järnväg

— kaksilaitteinen rautatie
dubbelplärrä Järnväg

— rakennella oleva rautatie
Järnväg under byggnad

 johkokärry (20 m) ledkurva
valikkärry (10 ja 5 m) mellankurva
späkkärry (2,5 m) hjälpkurva

— luonnonyksikkö yli ja alle 2 m
naturlig branta över och under 2 m

— tekijyrinne, yli t : t yli 2 m
kontinguerad branta över t : t och över 2 m

 Luisa pankkeresä ja teikkuksessa
bank och skärning

△ △ ○ kolmioipisteet ja monikulmioipisteet
triangelipunkter och polygonpunkter

0.14.17 .11a korkkeuslinjatipiste, korkkeusluku
Nöjdipunkte, höjdslifra

— valtakunnanraja
riksgrens


— lääninraja
länsigräns

— kunnanraja ja huomavarava rajapyykki
södergräns och större rose

 kyläraja
bygräns

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS
OF POOR QUALITY.

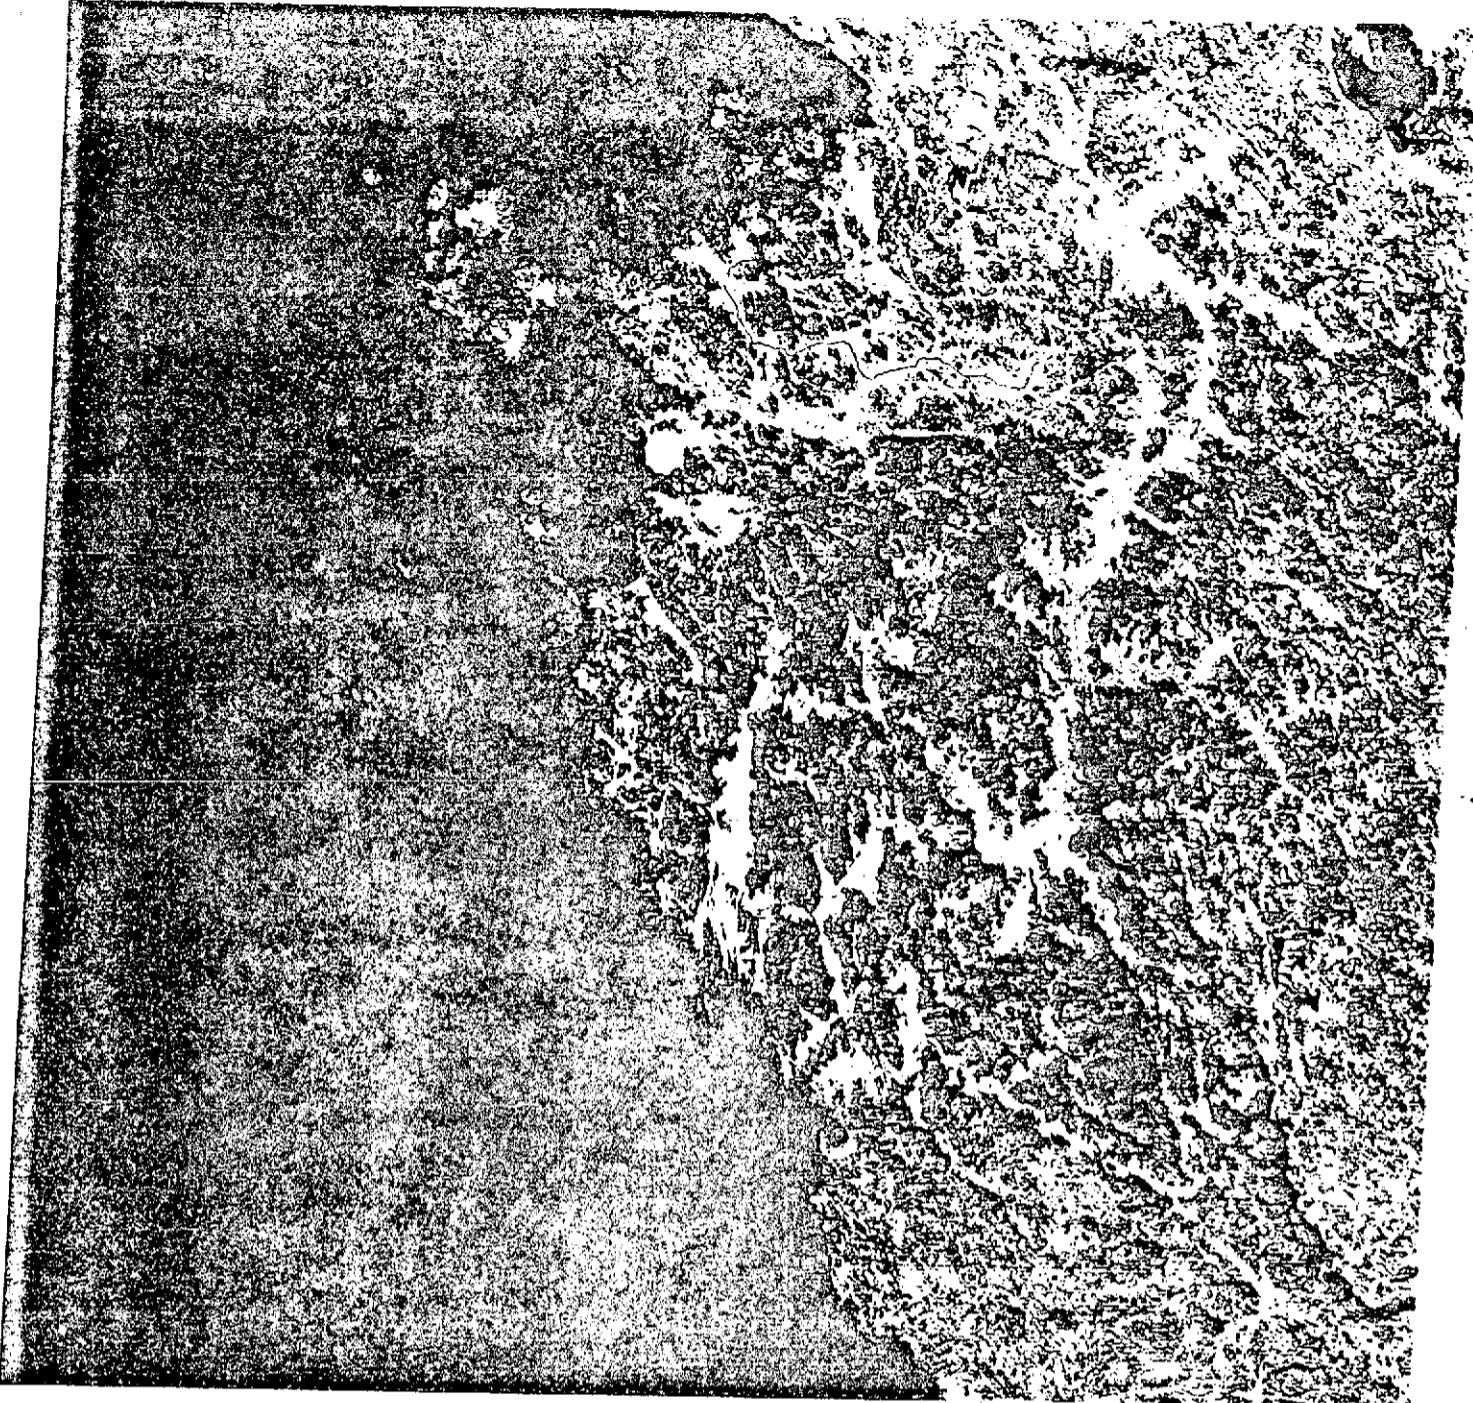

30AUG72 C NEZ 47 1/2 M

ORIGINAL PAGE IS
OF POOR QUALITY

• Appendix 4

Color composite made on Kodak Ektacolor
RC 37 paper

Scale 1:385000




FOLDOUT FRAME

Figure 5

Legend:

- A Open area
- K Spruce-hardwood swamp
- S Spruce-hardwood forest
- C Coniferous forest


Scale 1:385 000

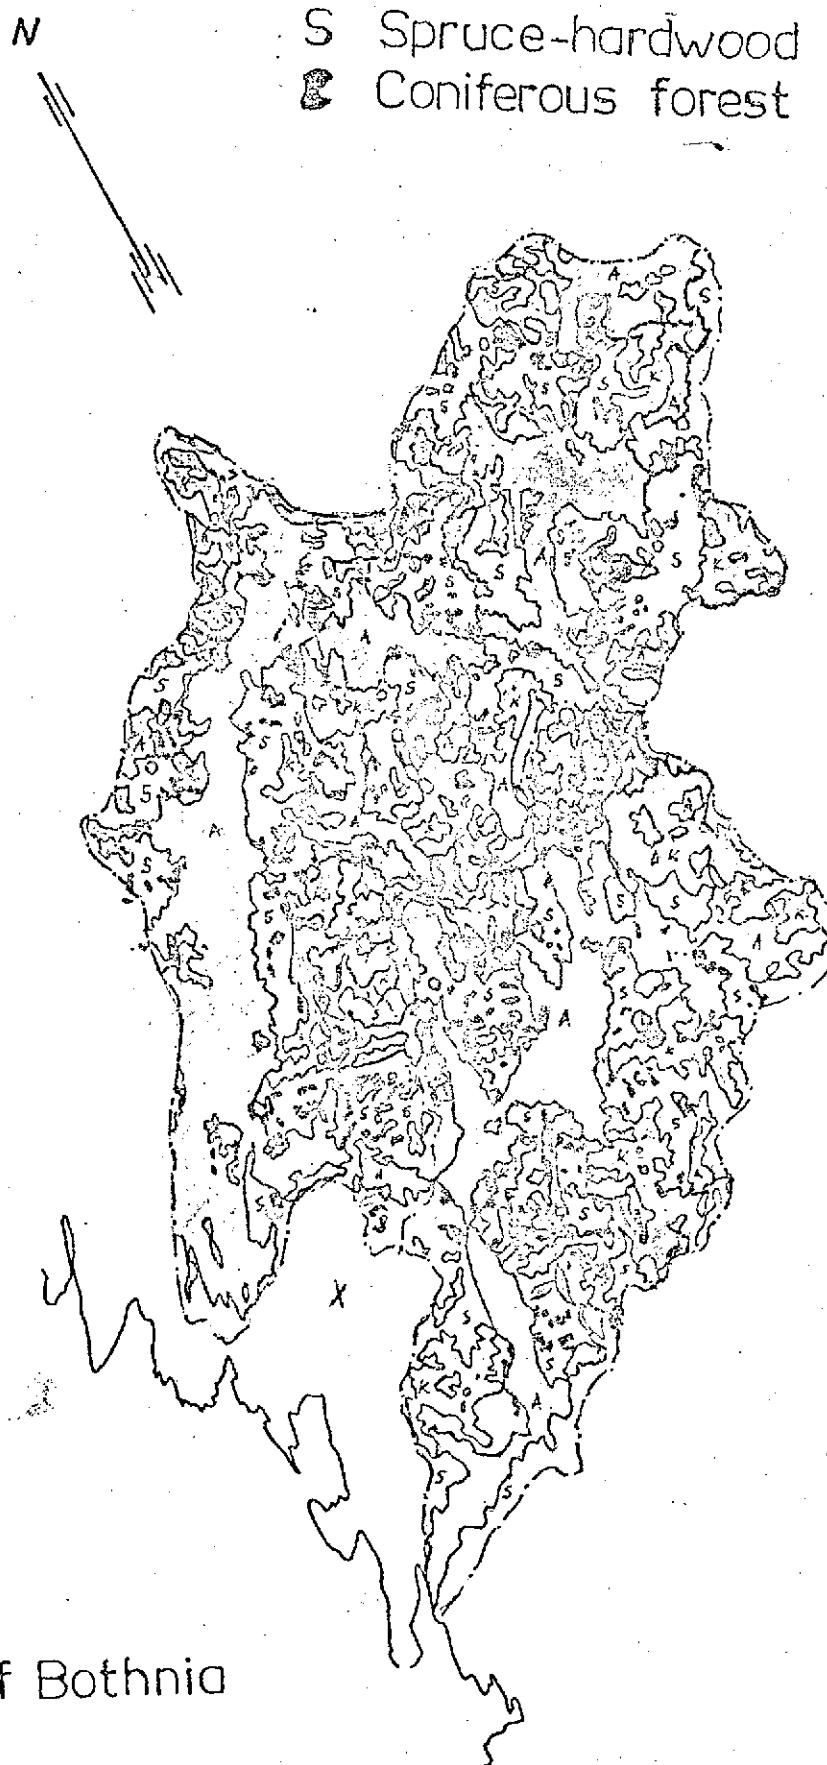

Appendix 6

MAAPERAKARTTA

Vaasa (Lehti B 3)

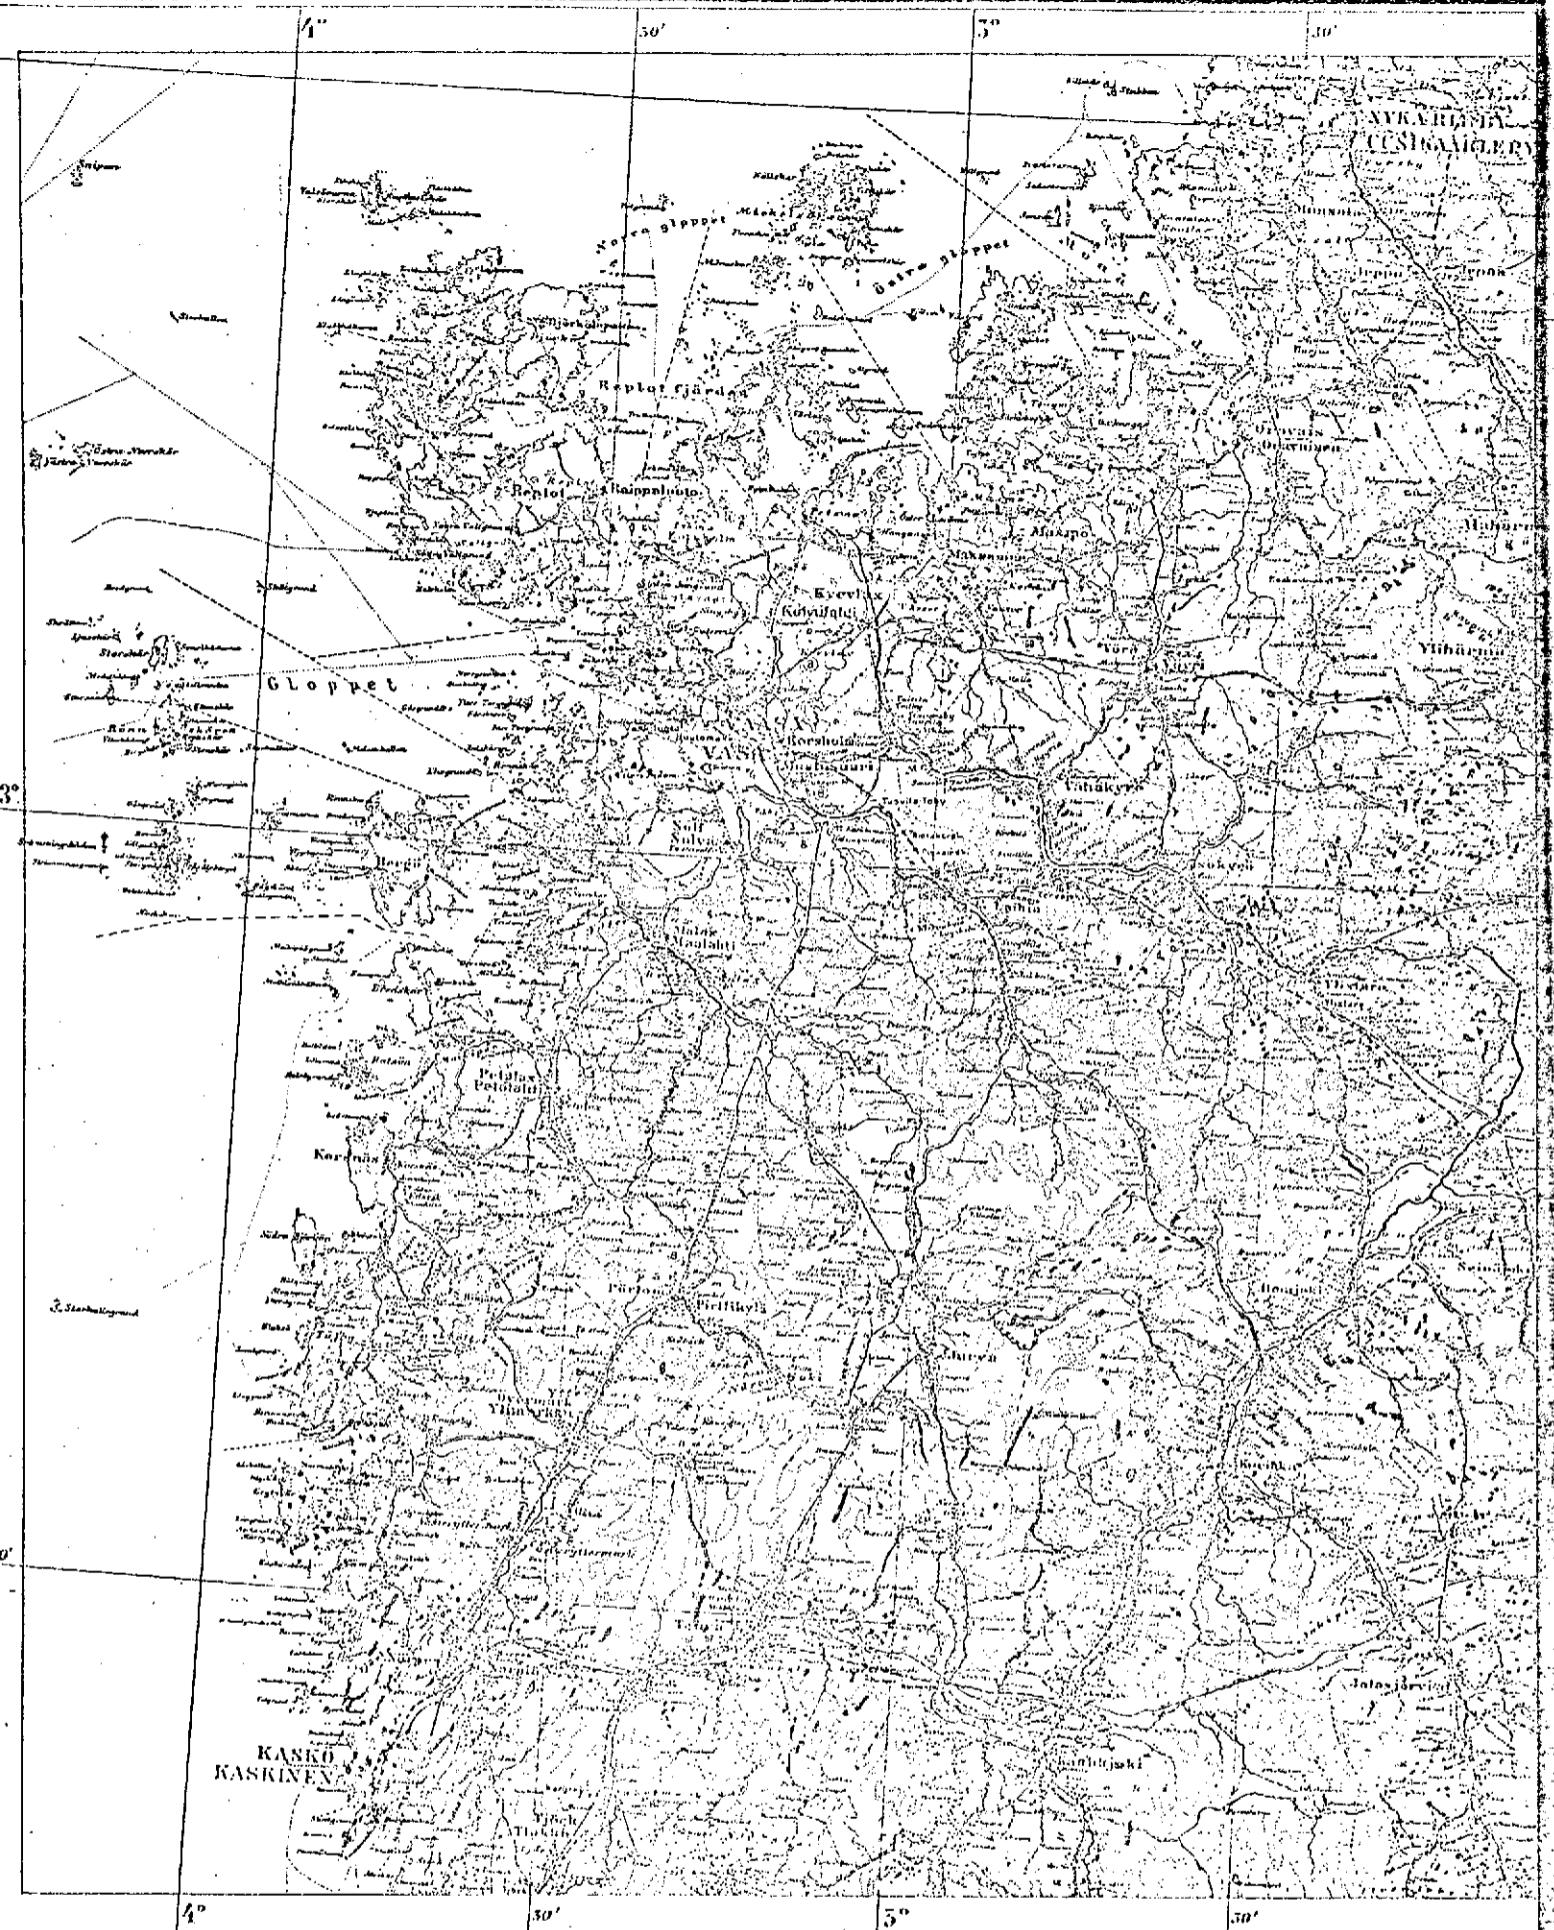


Pohjola Maanmittauslaitoksen Yleiskartta
Based on the General Board of Survey Map

ORIGINAL PAGE IS
OF POOR QUALITY

MAANMITTAUUSLAITOKSEN KARTTA 1951

Mittakaava 1:400,000 Scale 1:400,000

The densities of the testlines measured
in the B & W transparent photos

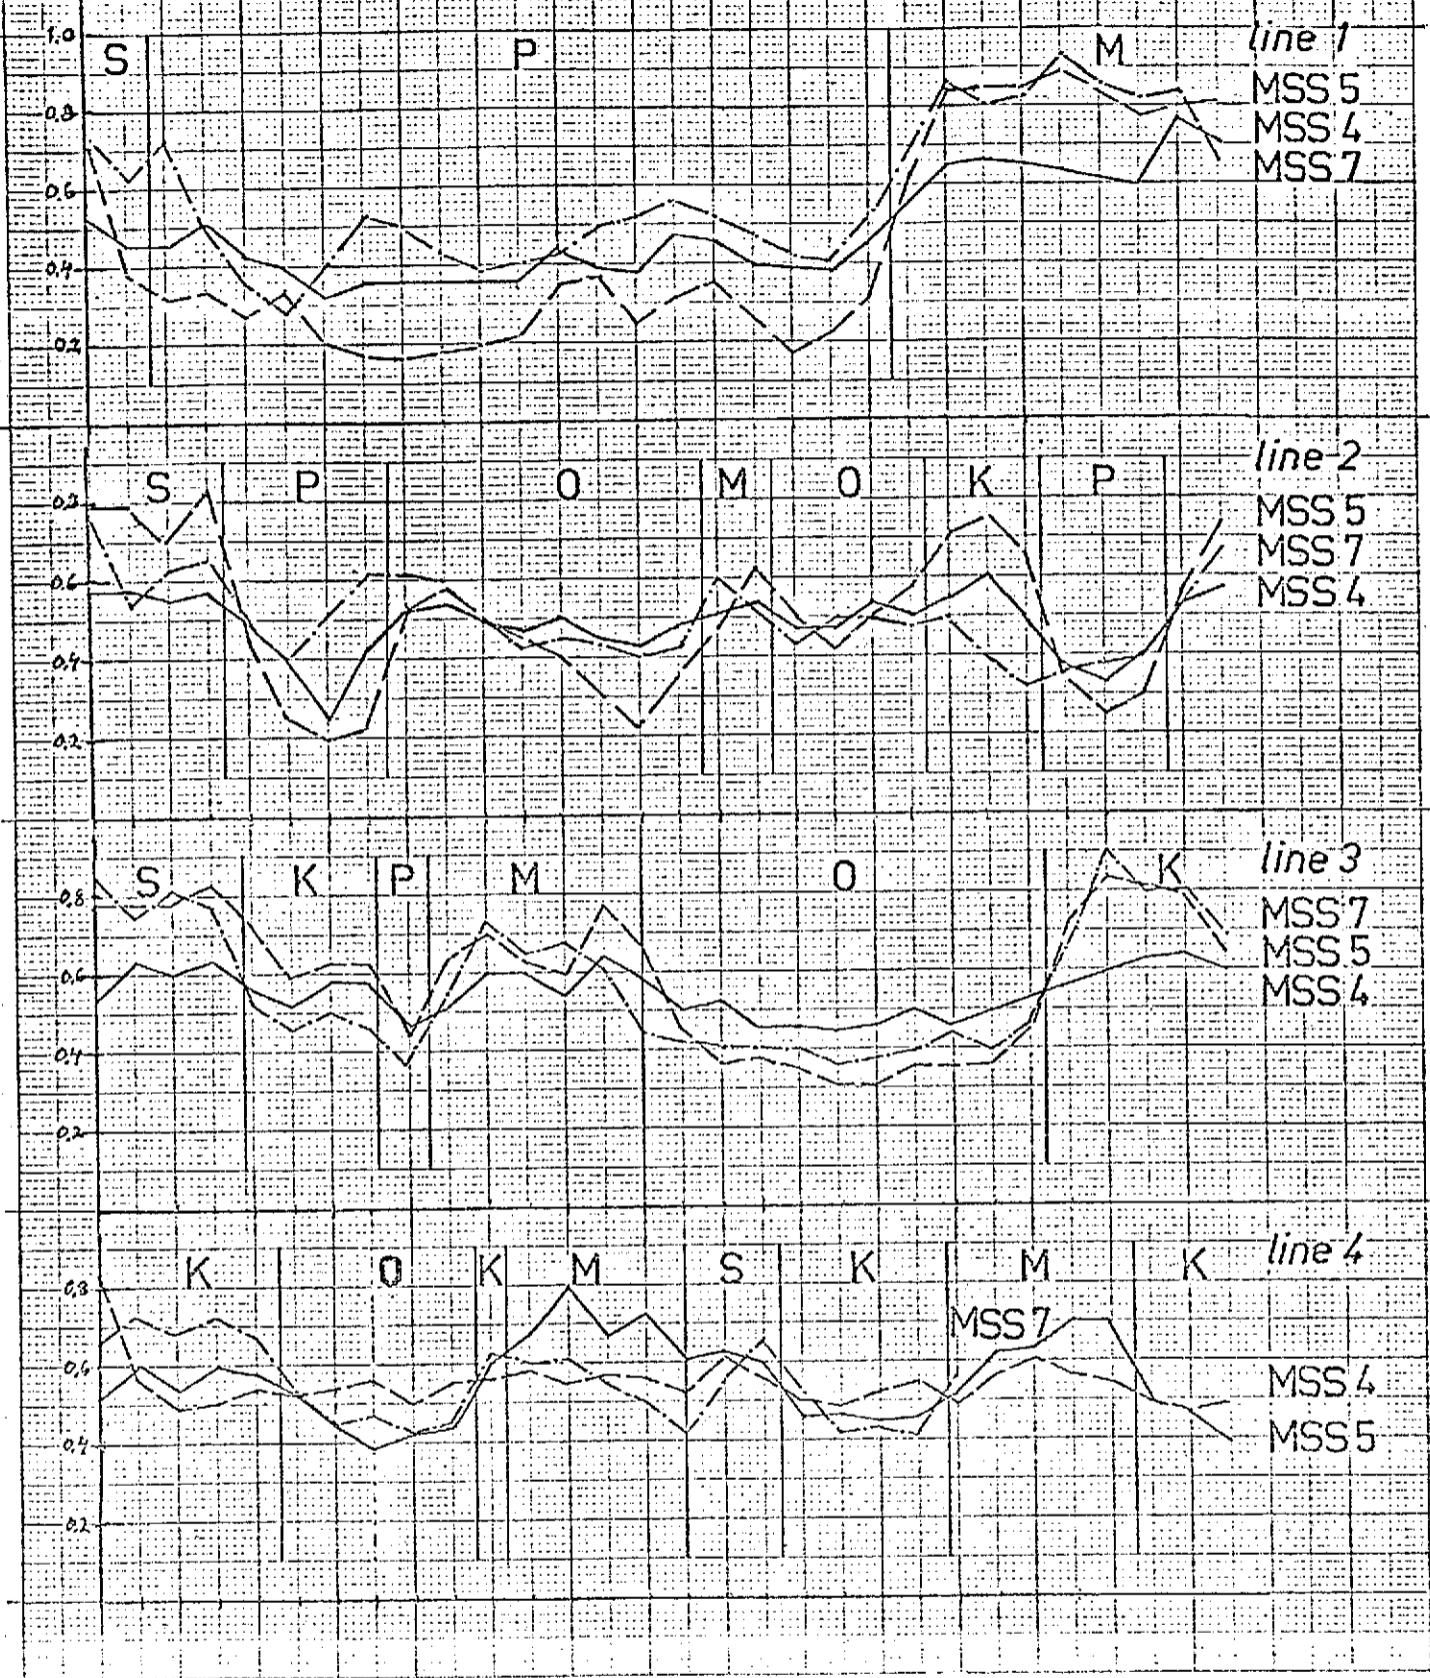

Legend:

K Spruce-hardwood swamp P Cultivated land
M Spruce and pine forest S Spruce-hardwood forest
O Open bog

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS
OF POOR QUALITY

Vaasa (Sheet B 3)



VARIEN SELITYS
EXPLANATION OF COLOURS

- Turvelta
Peat
- Sevea ja hiesua
Clay and silt
- Hiekkaa, hiekkaa ja soraa
Fine sand, sand and gravel
- Hiekkaa ja muista glaciiluviaalista selänteitä
Eskers and other glaciuvial ridges
- Moreenia
Till
- Kallioita
Rocks

C-46
ORIGINAL PAGE IS
OF POOR QUALITY

Page intentionally left blank